



**Smooth Gate
Operation**


**Personnel Fall
Protection**

EDGESAFE™ LOADING DOCK SAFETY GATE

THE SAFEST WAY TO KEEP THINGS MOVING ON YOUR DOCK

Accidents don't have to happen! The OSHA-compliant EdgeSafe™ Loading Dock Safety Gate from the PS Safety Access™ professionals reduces the danger of falls from docks, bays or exposed edges when closed. During deliveries, it's easy for truck drivers or dockworkers to open or close the gate. A busy loading dock is a good sign for any business, and a safe dock is an important way to keep your company healthy.

- **Safety That Pays** – The EdgeSafe Loading Dock Safety Gate keeps your team safe while keeping your dock running efficiently
- **Flexible Sizing** – Adjustable to fit a standard 8', 10' or 12' loading dock
- **Easy Operation** – Counterbalanced design makes it easy for one person to operate the gate smoothly with just one hand
- **No Slamming** – A unique dampening system keeps the gate from closing hard, and the damper is specially mounted high up to prevent it from becoming damaged
- **Lifts Out Of The Way** – The gate lifts vertically 90 degrees (without pinch points) to ensure plenty of clearance for loading and unloading
- **Built To Last** – Heavy-gauge steel and a powder coat yellow finish make it ideal for repetitive use
- **Ships via FedEx or UPS** – Once assembled, simply bolts to existing floor or concrete

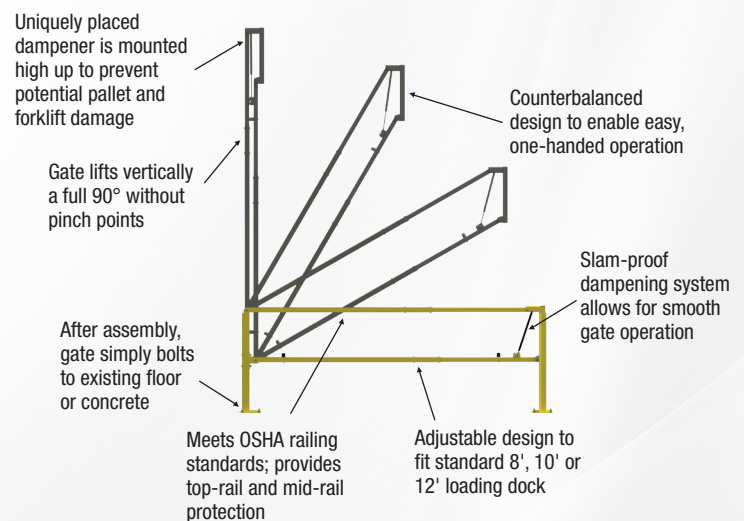

OSHA-COMPLIANT
The EdgeSafe Loading Dock Safety Gate meets OSHA Standards 1910.28 and 1910.29.

Ask About Our Other Material Handling Safety Gates



SafeMezz360™




**Pallet Rack
Safety Gate**



**SafeMezz™
Horizontal Gate**

701.746.4519 | 877.446.1519 | www.pssafetyaccess.com | 4psinfo@psindustries.com

STANDARD TECHNICAL DATA

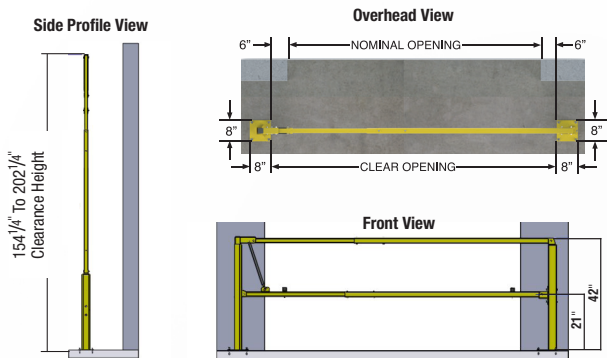

MEASURING GUIDE:

Product Number	Nominal Opening	Clear Opening	Clearance Height
LDSG-120-PCY	96" - 120"	108", 120" or 132"	154 1/4" to 178 1/4"
LDSG-144-PCY	120" - 144"	132", 144" or 156"	178 1/4" to 202 1/4"

INSTALLATION:

Assembly required. After gate is fully assembled, product simply bolts to existing floor or concrete

MATERIAL:

- Gate Rails: 1-3/4" square, mild steel tube, minimum 14-gauge, factory welded
- Gate Post: 3" square, mild steel tube, minimum 14-gauge, factory welded
- Gate Catch: 10-gauge formed mild steel, factory welded
- Fasteners: zinc plated
- Anchors: 3/8" expansion-type concrete anchors for installation into a minimum of 3,000 PSI concrete

FINISH:

Finish on all exposed, non-prefinished components to be powder coat safety yellow

PERFORMANCE RATING:

Gate shall meet or exceed OSHA requirements at the time of manufacture relative to dimensions and loading. One-year warranty from date of shipment, excluding finishes

FLEXIBLE SIZING – ADJUSTABLE TO FIT:

- 8', 9' or 10' openings (LDSG-120-PCY)
- 10', 11' or 12' openings (LDSG-144-PCY)

