

PAIRED LADDER SAFETY GATE

All Materials And Finishes (PCY/GAL/SS)



Powder Coat Yellow



Hot-Dip Galvanized




Stainless Steel (304)

Gate Sizing And Price Chart

Product Number*	Fits Opening Dimension		Powder Coat Yellow - PCY	Hot-Dip Galvanized - GAL	Stainless Steel (304) - SS
	Min	Max	Price Each	Price Each	Price Each
LSGDBL-9	18"	22-1/2"	\$433	\$441	\$667
LSGDBL-12	22"	28-1/2"	\$439	\$448	\$670
LSGDBL-15	28"	34-1/2"	\$447	\$456	\$674
LSGDBL-18	34"	40-1/2"	\$453	\$462	\$678
LSGDBL-21	40"	46-1/2"	\$459	\$468	\$680
LSGDBL-24	46"	52-1/2"	\$467	\$476	\$684

* For a specific product, indicate the finish abbreviation at the end of the Product Number (example: LSGDBL-9-PCY)

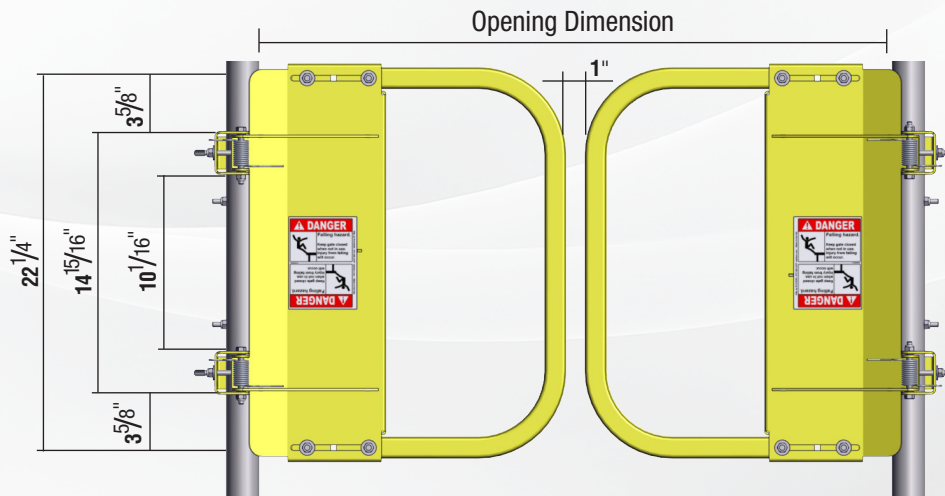

701.746.4519 | 877.446.1519 | www.pssafetyaccess.com | 4psinfo@psindustries.com




PAIRED LADDER SAFETY GATE


All Materials And Finishes (PCY/GAL/SS)

Gate Sizing Chart


Product Number	Fits Opening Dimension	
	Min	Max
LSGDBL-9	18"	22-1/2"
LSGDBL-12	22"	28-1/2"
LSGDBL-15	28"	34-1/2"
LSGDBL-18	34"	40-1/2"
LSGDBL-21	40"	46-1/2"
LSGDBL-24	46"	52-1/2"

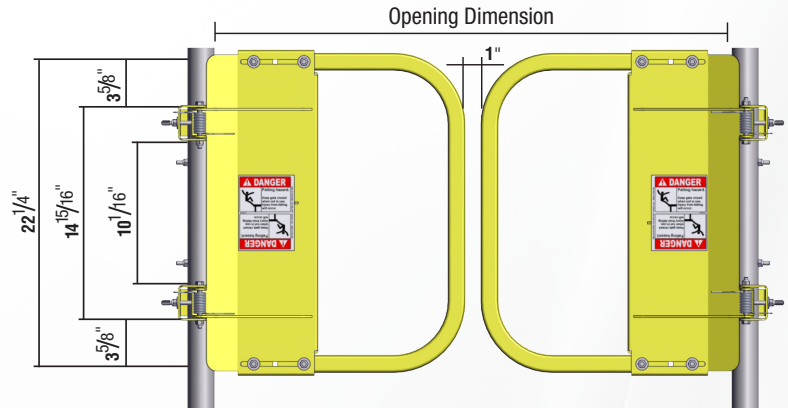


Wide-Angle Swing

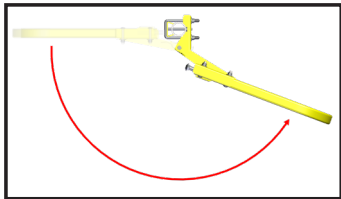


Adjustability

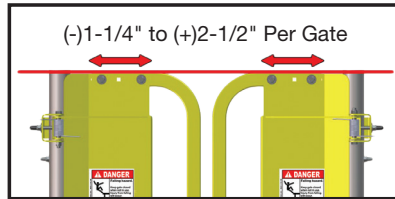


Standard Universal Hinge Bracket




Built-In Positive Stop



Hinge Detail



Flat Surface Mount Kit

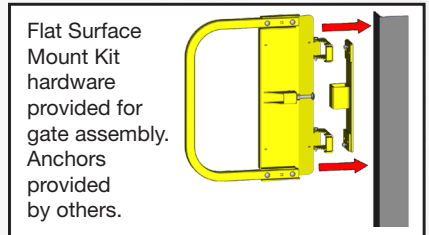

Gate Construction:

- Gate: 1-1/4", 11-gauge* square tubing. Minimum dimension from top of gate arm to bottom of gate arm is 22-1/4".
- Mounting Bracket: Universal mounting bracket fits round railings up to 2" O.D. and square railings up to 1-1/2" square. Bracket is adaptable to bolt to flat surfaces.
- Hinge Plate: 10 gauge, full height of gate. Hinge plate provides for gate adjustment of 3-3/4", (-)1-1/4" to (+)2-1/2".
- Standard Hardware: Square U-bolts, flat washers, nuts, plastic thread protector cap and support channel.
- Springs: Torsion type, stainless steel. Minimum of two (2) springs per gate, housed within hinge pivot.
- Material & Finish: To be one of the following, based on model:
 - Mild steel, powder coat yellow. Hardware to be zinc plated.
 - Mild steel, hot dip galvanized. Hardware to be zinc plated.
 - Stainless steel, 304-2b, unpainted. Hardware to be stainless steel type 316.
 - Stainless steel, 16 gauge, unpainted. Hardware to be stainless steel type 316.
- Gate Operation: Allows for 180° travel. Gate swing direction is reversible by inverting or rotating.
- Packaging: Carton includes two gates, standard mounting hardware and Installation/O&M Manual.
- Warranty: 1 Year Limited.

*Stainless steel, 16-gauge square tubing.