



## PALLET GATE


All Materials & Finishes (PCY/SS)

### Gate Sizing Chart



| Model Number | Standard Opening Width | Shipping Weight |
|--------------|------------------------|-----------------|
| PLG-6084     | 60"                    | 200 lbs.        |
| PLG-7284     | 72"                    | 220 lbs.        |
| PLG-9684     | 96"                    | 250 lbs.        |

Overall unit width is opening width plus 5-3/4 inches.


Toeboard

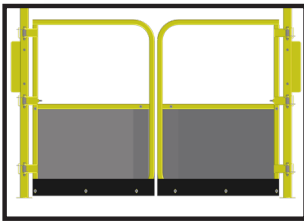


High-Impact Bumpers

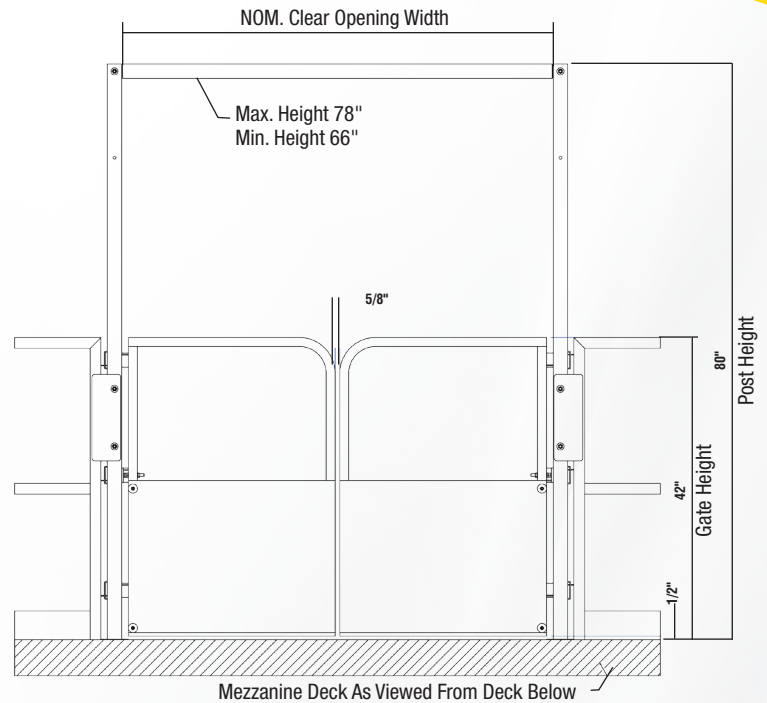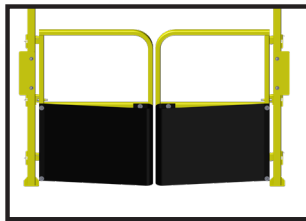


Mounting Bracket Detail

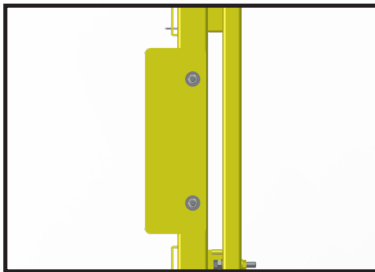

Base Plate

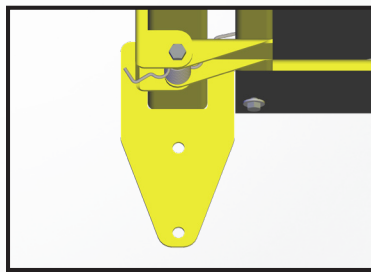

Hinge Detail

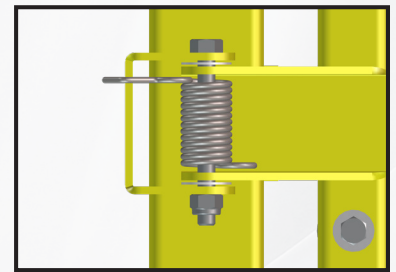

### Gate Construction:

- Standard Dimensions: 60", 72" or 96" opening width and opening height up to 78".
- Gate: Formed 1-1/4" square, 11-gauge tubing, self-closing.
- Gate Columns: 2" square, 11-gauge tubing.
- Teardrop Impact Bumpers: High-impact, ABS bumpers with 3" projection.
- Toeboard: ABS adjustable 4" toeboard.
- Gate Operation: Allows for 180° travel.
- Hinge Bracket: Standard, pivot bracket.
- Mounting Bracket: 7-gauge, formed 5" x 10" angle plate with integral support post connections.
- Hinge Springs: Torsion type, stainless steel. Includes three (3) springs per gate, housed within hinge pivot.
- Material & Finish: To be one of the following, based on model:
  - Mild steel, powder coat yellow. Hardware to be zinc plated.
  - Stainless steel, 304, unpainted. Hardware to be stainless steel type 316.
- Gate shall meet or exceed OSHA requirements, relative to dimensions and loads, at the time of manufacture.

701.746.4519 | 877.446.1519 | [www.pssafetyaccess.com](http://www.pssafetyaccess.com) | [4psinfo@psdoors.com](mailto:4psinfo@psdoors.com)