



Manual Or Automated Operation

Compliant

OSH

SAFEMEZ Horizontal Gate

DURABLE, FLEXIBLE SAFETY FOR YOUR MEZZANINE

The SafeMezz® Horizontal Gate keeps your employees safe from dangerous falls and improves the efficiency of your material handling. Once installed on a mezzanine, this gate slides open and slides closed as needed, allowing you to forklift materials to your elevated space while protecting your crew. It's ideal for mezzanine openings, pallet racking areas, warehouses and picking/packing areas.

IMPROVES EMPLOYEE SAFETY

- Meets OSHA standards 1910.28 and 1910.29
- Includes 4" toeboard

DURABLE CONSTRUCTION

- · Heavy-duty 1.5" X 1.5" 11-gauge square tube gate construction
- · Long-lasting, powder coat safety yellow finish (custom stainless steel finish available)

VERSATILE INSTALLATION & OPERATION

- · Available in two stock sizes with custom widths up to 12'
- On-deck or off-deck mounting options
- Available in manual and electric

Additional SAFEMEZZ® Gate Options



SAFEMEZZ360[™]







Downward Gate












STANDARD TECHNICAL DATA

OPERATION OPTIONS:



Electric Operator

Manual Handle / Latch



9¹/8'

127/8"

Side View

4^{13/16"}



MEASURING GUIDE:

Opening Width

48" (Made to order)

48" (Made to order)

72" (Stocked size)

72" (Stocked size)

96" (Stocked size)

96" (Stocked size)

120" (Made to order)

120" (Made to order)

144" (Made to order)

144" (Made to order)

Custom sizing and design available,

mild steel product numbers shown.



Product Number

MGHMM048042

MGHEM048042

MGHMM072042

MGHEM072042

MGHMM096042

MGHEM096042

MGHMM120042

MGHEM120042

MGHMM144042

MGHEM144042

Pull Cord

-

Operator Option

Manual

Electric

Manual

Electric

Manual


Electric

Manual

Electric

Manual

Electric

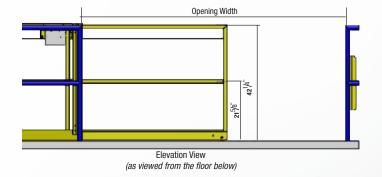

MATERIAL:

- · Gate: 1-1/2" square, 11-gauge tube, factory welded. Solid horizontal top rail and mid-rail, 4" high toeboard, 42" overall height, and vertical members not to exceed 8' on center
- · Gate material to be one of the following:
 - Mild steel
 - Stainless steel, 304-2b (contact PS Safety Access for stainless steel product number)

HARDWARE:

· Track, guides, brackets, and mounts: Furnished in accordance with material

type and dimensional requirement of gate, in lengths and sizes appropriate for handling and shipping

INSTALLATION:

Mounting location: Deck mount (standard) or face mount available

FINISH:

- · Mild steel: Powder coat yellow on all unfinished exposed surfaces (standard)
- · Stainless steel: Mill finish/unpainted on all unfinished, exposed surfaces (custom)

PERFORMANCE RATING:

· Gate shall meet or exceed OSHA requirements, relative to dimensions and loads, at the time of manufacture

701.746.4519 | 877.446.1519 | www.pssafetyaccess.com | 4psinfo@psindustries.com

Rev052319

